




لوجيك للتجهيزات الفنية
Logic Technical Supplies

Dimensions of Non-Metallic Flat Gaskets ASME B16.21 to be used with Raised Face flanges ASME B16.47 series A

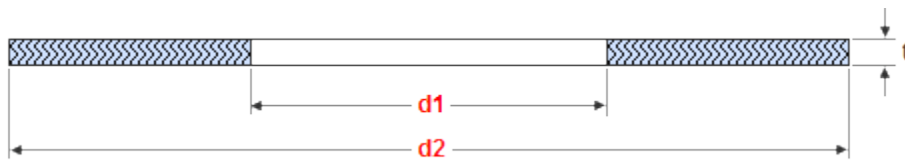

Class 150 to 600 NPS 26 to 60

NPS	d1	d2			
		Class 150	Class 300	Class 400	Class 600
26	660	775	835	832	867
28	711	832	899	892	914
30	762	883	953	946	972
32	813	940	1006	1003	1022
34	864	991	1057	1054	1073
36	914	1048	1118	1118	1130
38	965	1111	1054	1073	1105
40	1016	1162	1114	1127	1156
42	1067	1219	1165	1178	1219
44	1118	1276	1219	1232	1270
46	1168	1327	1273	1289	1327
48	1219	1384	1324	1346	1391
50	1270	1435	1378	1403	1448
52	1321	1492	1429	1454	1499
54	1372	1549	1492	1518	1556
56	1422	1607	1543	1568	1613
58	1473	1664	1594	1619	1664
60	1524	1715	1645	1683	1721

General notes:

- Dimensions are in millimeters unless otherwise indicated.
- $d2$ = Outside diameter.
- Dimensional tolerances outside diameter: $+0 / -3.0$ mm.
- Dimensional tolerances inside diameter: ± 3.0 mm.
- Thickness (t) specified by customer.